4x4 All Terrain Winches

AP 1500 4 x 4 All Terrain Winch – 12 Volt Model

Need a helping hand loading or unloading your ATV? Our AP1500 saves you more time for play! Includes ball hitch adapter plate for convenient temporary mount and a standard connect wiring harness for quick set-up.



- 15,000 lbs rolling load weight (not to be used as a hoist)
- Power-in/freewheel-out
- ▶ 10' remote control cord & switch
- ➤ 30' x 7/32" cable ➤ Emergency crank handle
- Emergency crank handle
 Two year limited warranty
 Part # P77207

AP 3500 All Purpose Winch – 12 Volt Model

Great for really tough jobs at home, on the road, or at work. Includes ball hitch adapter plate for convenient temporary mount and a standard connect wiring harness for quick set-up. One year warranty.



- ▶ 35,000 lbs rolling load weight
- ▶ Power-in/freewheel-out
- 10' remote control cord & switch
 40' x 7/32" cable
- Pulley block
- ▶ Emergency crank handle

Part # P77331

VS 190 Specialty Winch – 110 Volt Model


Provides plenty of power for multiple uses wherever 110 volts are available. Strong "man-power" the easy way!



- ➤ Rolling load 17,500 lbs (not to be used as a hoist) ➤ Power-in/freewheel-out
- ▶ Emergency crank handle included
- ▶ 60 amp wiring harness
- ► Two year limited warranty Part # P77190

Powerwinch

2145 W. 6th Ave. Broomfield. CO 80020 • www.powerwinch.com

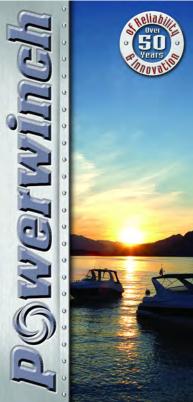



Max. boat length: 30'
Max. boat weight: 11,500 lbs

Single line vertical lift capacity: 4000 lbs

Double pull/line capacity: 7500 lbs (Not to be considered or used as a haist)

Both the Remote Control 30 & 23 feature:

- ▶ Wireless remote operation
- ▶ Convenient light enclosed in the trailer winch casing to assist you
- Emergency crank conveniently stores in winch casing
- ➤ Features remote power-in/freewheel-out operation
- Re-designed, stronger housing
- Pulley block provides for double line applications
- ▶ Two year limited warranty

Model RC 30 Part # P55950

Effortless trailer loading, remote control and . . .



The RC 30 and RC 23 are remotely operated so loading your boat onto the trailer is easier than ever! No more cranking, struggling and pulling. With Powerwinch's new RC 30 and RC 23, just stand back, push the remote button and watch the boat glide on to the trailer.

12 Volt Remote Control 23 Trailer Winch

Max. boat length: 23'
Max. boat weight: 7500 lbs

Single line vertical lift capacity: 2400 lbs

Double pull/line capacity: 4300 lbs (Not to be considered or used as a hoist)

Included with the Remote Control 30 & 23:







Both the Remote Control 30 and 23 include a push-button unit and an emergency crank that stores conveniently in the case. Also included is a 60 amp wiring harness and all hardware necessary for installation.

Model RC 23 Part # P55750

RC 23 state_of_the_art trailer winches

A built-in light so you can use your boat at night!

Get the latest in technology and strength with the Powerwinch RC 30 and

All Powerwinch 12V trailer winches have smooth-running, heat-treated gear systems for long life and protection against wear and tear. They feature a corrosion-resistant zinc-plated frame, an aircraft quality cable, a level wind system to prevent cable snarfs and a UV resistant ABS plastic housing.



12 Volt electric model
The Powerwinch Model 912 Trailer
Winch is well established with a Winch is well established with a solid, reliable reputation. It features

smooth power-in/free-wheel out action. You can use a pulley or block at the bow eve to double your pulling power. Two year warranty,

30' suggested max boat length (suggested)

- Max, boat weight of 11,500 lbs
- Features power-in/freewheel-out operation 60 amp standard wiring harness
- Pulley block for double line applications
- Two year limited warranty
- Vertical lift capacity (single line): 4000 lbs. Double pull/line capacity: 7500 lbs

Model 912 Part # P77912

Stainless Steel Universal Replacement Winch Cables

For all manual and electric trailer winches. High chromium content and added nickel make these cables virtually impervious to corrosion and add years of service. Ideal for any winch using 7/32" diameter cable, designed for handling boats up to 11,500 lbs. Superior 7 x 19 strand cable construction

Select the right replacement for your old, worn cable

Model P1088100A1 Model P1096500A I Model P1088200A1 Model P1096600A1



12 Volt electric model
The Powerwinch Model 712 Trailer
Winch is virtually identical to the

a smaller hoat. The Model 712 features the same power-in/ freewheel-out operation, wiring harness and pulley block for double line application as the Model 912. Two year limited warranty

23' suggested max. boat length (suggested) Max, boat weight of 7500 lbs

 Vertical lift capacity (single line): 2400 lb Double pull/line capacity: 4300 lbs

Model 712. Part # P77712

for maximum pulling strength. Complete installation instructions included. Available with heavy duty zinc plated swivel pulley block.

25' with aalvanized hook 25' with galvanized swivel pulley block & hook

50' with galvanized hook 50' with galvanized swivel pulley block & hook





POWER-IN. DOWER-OUT allows you to control your boat as it is lowered into the water. The 915 comes complete with a 10' remote control cord and switch. It also features a pulley block for double-line applications, emergency hand crank and a 60 amp standard wiring harness.

Max. boat length: 29' (suggested) Max. boat weight: 9,500 lbs

- Vertical lift capacity: 3200 lbs
- Double line capacity: 7500 lbs (not to be used as a hoist)
- Power-in/power-out control
- Line speed 10 FPM
- 12 volt operating power
- ▶ 10' remote control cord and switch
- ▶ 40' x 7/32" cable
- Manual hand crank
- Pulley block for double-line availability 60 amp standard wiring harness
- ▶ Two year limited warranty

Model 915 Part # P77915

Why power-in/freewheel-out . . . or power-out?

With the power-in/freewheel-out system, the electric motor pulls the boat onto the trailer yet has a clutch release that allows gravity to float the boat easily into the water. If you need more control when deploying your boat. get the power-out 915 Trailer Winch.

POWER-IN. Freewheel-OUT for fastest anchoring and retrieval speeds. The Model 215 easily retrieves fishing and light-weight boats. The Model 315 is designed for mid-size boats. Both are 12 volt. electric cable winches and feature an adjustable clutch for controlled boat launching. It's easy to self-load with switch and convenient 25' lanvard cord. Both come complete with a color coded 30 amp standard wiring harness for easy connection to the vehicle's battery. Regardless of size. Powerwinch winches are made from the highest grade materials and designed for long wear.

Model 215 Part # P77702

16' suggested maximum boat length (suggested) Max, boat weight: 3500 lbs

- Vertical lift of 1500 lbs
- Easy to self-load with convenient 25' lanvard cord
- One year warranty

Model 315 Part # P77315

17' suggested maximum boat length (suggested) Max. boat weight: 4000 lbs

- Vertical lift of 1650 lbs
- Easy to self-load with convenient 25' lanyard cord
- Line speed of 15 FPM
- Two year warranty

20' × 3" strap 20' × 2" strap

30 amp

225:1

20'×7/32'

3.5" × 10" × "3.6





Strap winches are strong vet easier to work and easier on the hands than cables.



12 Volt Electric Model

Max. boat length: 17' Max, boat weight: 4000 lbs Max. vertical lift: 1500 lbs

The Model ST 215 features a 20' x 2" polyester strap and powerin/freewheel-out operation. The Model ST 215's reliable spur-gear system provides more powerful pull with less amperage draw. Rugged ABS weather-resistant housing for the toughest environments. Positive Lock prevents unwanted strap slippage. Fast, easy installation and a one year limited warranty. Accessories not shown include a 30 amp circuit breaker, trailer mounting hardware, emergency hand crank, color-coded wiring harness and a 25 foot lanvard for operating the winch.



Electric Model

Max. boat length: 23' Max. boat weight: 7500 lbs

12 Volt

The ST 712 features easy power-in/freewheel-out operation and is ideal for float-on trailers. Quality motors and the heat-treated spur gear mechanism provide the strength and power needed for many years of carefree boating. Vertical lift capacity of 2000 lbs

- (Not to be used as a hoist) Line speed of 10 FPM
 - ▶ 12 volt power source
 - Emergency hand crank
- ▶ 20' x 3" UV resistant strap
- ▶ 60 amp standard wiring harness
- Two year limited warranty
- Comes complete with all wiring. installation hardware and a 25 foot lanyard for operating winch

wo main factors determine which trailer winch is best for you. Trailer winches are rated by the amount of weight of the boat, and also their pull rating or lift capacity Powerwinch comparison chart What size of 12 volt trailer winch do you need?

and and
Dimensions
Unit Weight
Circu it Breaker
Ge ar Ratio
Double Line Capacity
Light
Remote Control
Vertical Lift Capacity
Line
Max. Boat Weight*
Sugg Boat Length
린

Dimensions
Unit Weight
Circuit Breaker
Ge ar Ratio
Double Line Capacity
Light
Remote Control
Vertical Lift Capacity
Speed Speed
Max. Boat Weight*
igg Boat Length

Ratio	s 450
Capacity	7500 lbs
	Yes
Contro	Yes
Capacity	4000 lbs
Speed	8 f.p.m.
Weight*	11,500 lbs
اء دُ	'n

40'×7/32

9.5" × 11.5" × 9" 9.5" × 11.5" × 9"

30 amp

 $10' \times 7/32$ 10'×7/32 $20' \times 7/32$ $20' \times 7/32$

 $10" \times 10" \times 8"$ 0" × 10" × 8" $10' \times 10' \times 8'$ 10" × 10" × 8" $10" \times 10" \times 8"$ $10' \times 10' \times 8'$

> 33 lbs 22 lbs 29 lbs 23 lbs

30 am 30 amr 30 amr 30 amp 30 amp

30 am

900 lbs 500 lbs 300 lbs

Contro	Yes	Yes	No
Capacity	4000 lbs	2400 lbs	3200 lbs
2000	8 f.p.m.	14 f.p.m.	10 f.p.m.
il.	28	26	26

		200	1
23'-30'	11,500 lbs	8 f.p.m.	4000 lbs
17'-23'	7500 lbs	14 f.p.m.	2400 lbs
22'-29'	9500 lbs	10 f.p.m.	3200 lbs
23'-30'	11,500 lbs	8 f.p.m.	4000 lbs
17-23	7500 lbs	14 f.p.m.	2400 lbs
14-17	4000 lbs	15 f.p.m.	1650 lbs
in to 16'	3500 lbs	12 f.n.m	1500 lbs

When calculating boat weight, be sure to include boat, motor, fuel, gear and supplies. If in doubt, select the next larger size 1500 lbs 10 f.p.m. 000 lbs up to 17"

2000 lbs

500 lbs

ip to 23



PUSh Button Anchoring! For use with pontoon and deck boats with river and mushroom anchors. Features a removable switch that can be mounted on the helm. Detachable bow roller. You year limited warranty. Installation kit included. Available with

- Built-in light for added convenience
- Power up free fall down
- > 100 ft. of 3/16" nylon rope
 - 33 ft/min. average retrieval speed with a 50 lb. anchor (85 ft/minute with no load)

optional Remote Control. (Must be purchased separately).

▶ 12V DC sealed motor

chor wind asses 6



Anchor Windlass Comparison Chart

Deck Mate Push Button Anchoring!

PUSH BULLON HICHORING!
Features a removable switch
that can be mounted on the
helm. Automatically spools
anchor line. For use with river
and mushroom anchors. Installation
kit included. Two year limited warran

anchor line. For use with river and mushroom anchors. Installation kit included. Two year limited warranty. Available with optional Remote Control. (Remote control must be purchased separately).

- ▶ Power-in/Power-out
- Use with anchors up to 25 lbs.
- Max. retrieval speed: 70 ft/min.

 Part # P77724
- 12V DC with sealed motor
 100 ft. of 3/16" nylon rope

Maximum pulling power: 100 lbs.

Pontoon Boat Anchor Windlass Fishing and

Fishing and boating just got more fun by using the Class 24 Pontoon & Fishing Boat Anchor Winch. No more hanging over the boat to retrieve your

Part # P77719

Detachable

how roller

anchor! The Class 24 Pontoon Winch is a great Anchor Winch for boats up to 24 ft. Two year limited warranty.

- Automatically retrieves and spools the anchor line
- ▶ 12V operating power with 15 amp circuit breaker
- Lifts river and lake anchors up to 32 lbs
- Lifts river and lake anchors up to 3
 Retrieval speed 80 ft/minute
- Installation kit includes 30' of red and 30' of black 10-gauge wire

Fore & aft anchors keep your boat where you want it!

Pontoon owners need two anchors and two windlasses. With their high profile, pontoon boats tend to swing in the breeze more than other boats. When fishing, swimming, or just relaxing with the perfect view, two anchors keep the boat where you want it. They also prevent boats from drifting away from swimmers and into other boats or shorelines.

Choose the right winch for your boat

michor Hindrago comparison onarc								and one one right miner for don none				
Model	Boat Length	Max. Pull	Retrieval Speed	Line Size	Max. Rope	Power Source	Unit Weight	Min. Suggested Wire Size	Thermal Resetting Circuit Breaker	Overall Dimensions		
Deck Mate 19	19'	100 lbs	70'/min	3/16"	100'	12 volts	13 lbs	10 gauge, 50' run	15 amps	11"L x 9-1/2"W x 7"H		
Pontoon Boat 24	24'	100 lbs	80'/min	3/16"	100'	12 volts	13 lbs	10 gauge, 50' run	15 amps	11"L x 9-1/2"W x 7"H		
Deck Mate 25	25'	100 lbs	85'/min	3/16"	100'	12 volts	13 lbs	10 gauge, 50' run	25 amps	10"L x 8-1/2"W x 8-1/2"H		

Watertight seals

Heat treated oil-impregnated gear systems

One piece motor plate

For smooth power transmission & improved agar life

For additional protection against corrosion

Durable aluminum housing with e-coat primer and polyester powder coat No plastic parts to crack - Finish is chip-resistant

Patented Free-Fall System anchors up to 300'/min Up to four times faster than powering down

Exclusive stainless steel rope and chain guidance system Durable materials stand up to years of use

Ultra smooth motor uses less amps Free-fall does not need battery power so it preserves your battery

Ruilt with durable stainless steel fasteners Resists corrosion for easy removal

Protect-a-deck rubberized deck gasket Keeps unit from scuffing your deck

Helm operated one-touch control Easy to reach and easy to use

Replaceable Rode-Glide Smoothly channels rope and chain below deck

For years of smooth reliable performance

Above deck design More storage space

Stainless steel drive shaft

Use tapered back splice For smooth rope-to-chain transition

Sleek styling with small footprint Uses up to 40% less deck space than the competition

Benefits of Free-Fall over Power-Down:

- Fastest way to anchor Anchor drops up to four times faster! Safety – Allows you to anchor quickly in poor conditions.
- Fasiest way to anchor Free-Fall stops when the anchor has reached bottom - Rope does not collect on your deck while you power down.
- Easiest to use Just hold the helm switch for only five seconds to release free-fall, versus one to three minutes powering down,
- Precise anchoring location Anchor your boat where you want it to be. unlike powering down where your boat will drift while you power down.

Sport Fish 450

Class 31'

Class 36'

2

Class 41

class 46'

Suggested retail: P77727 \$759

P77731\$859

7726 \$0.40

10

P77746\$1.139

Froo-Fall Anchor Windlage Comparison Chart

	Find	the u	rindlass	that's	rinht	for monr	hnat	
7736		\$949	P77741	\$	1,059	P77746		

TICC TUIL IIIICII	ui milluluss cullipt	IIIJUII GIIUI G	I III U CIIC L	unanass chac s tiğlic	Joi doni none
Boat Size	Up to 27 feet	Up to 31 feet	Up to 36 feet	Up to 41 feet	Up to 46 feet
Pulling Power 450 lbs		625 lbs	775 lbs	900 lbs	1100 lbs
Retrieval Speed	70' / minute	80' / minute	80' / minute	75' / minute	70' / minute
Anchoring Speed	Up to 150' / minute	Up to 200' / minute	Up to 250' / minute	Up to 300' / minute	Up to 350' / minute
Line Size & Type (required) 1/2" Powerwinch Premium Medium Lay Nylon		1/2" Powerwinch Premium Medium Lay Nylon	1/2" Powerwinch Premium Medium Lay Nylon	5/8" Powerwinch Premium Medium Lay Nylon	5/8" Powerwinch Premium Medium Lay Nylon
Chain Size & Type (required)	1/4" Hi-test ACCO G4	1/4" Hi-test ACCO G4	1/4" Hi-test ACCO G4	5/16" Hi-test ACCO G4	5/16" Hi-test ACCO G4
Rodes (sold separately)	P10293-P10296	P10293-P10296	P10293-P10296	P10297-P10300	P10297-P10300
Rope & Chain System	Metal Alloy	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Replaceable Rode-Glide	Engineered Resin				
Helm Operated Control Sw	itch Rocker	Rocker	Rocker	Rocker	Rocker
Avg. Amp Draw (during retries	val) 8-10 amps	8-12 amps	8-12 amps	10-14 amps	14-18 amps
Install Kit	P55800	P55800	P55800	P55600	P55600
Required Wire Size to Battery	8 gauge (50' run) 6 gauge (over 50' run)	8 gauge (50' run) 6 gauge (over 50' run)	8 gauge (50' run) 6 gauge (over 50' run)	6 gauge (70' run)	6 gauge (70' run)
Standard Equipped Thermal Circuit Breaker	25 amp auto reset	60 amp auto reset			
Manual Reset Circuit Breaker (optional)	Optional 25 amp P1070400AJ	Optional 25 amp P1070400AJ	Optional 25 amp P1070400AJ	Optional 25 amp P1070400AJ	P1064800AJ
Dual Switch Solenoid	Optional P1028200AJ	Optional P1028200AJ	Optional P1028200AJ	Optional P1028200AJ	Included
Unit Weight	21 lbs.	22 lbs.	22 lbs.	23 lbs.	24 lbs.
Overall Unit Dimensions	10-9/16" L x 7" W x 6-5/16" H				
Warranty	2 years	2 years	3 years	3 years	3 years

Powerwinch Free-Fall Anchor Winch Rodes



- ▶ 8 lengths to meet your needs
- All rodes come with a tapered backsplice
- 1/2" and 5/8" Powerwinch premium three strand nylon line, tested to be the highest
- quality and best performing line
 Acco G4 Hi-Test 1/4" and 5/16" chain

Required for Powerwinch Free-Fall anchor winches

- ▶ 1/4" Hi-Test offers 50% more strength than 1/4" BBB
- ▶ 5/16" Hi-Test offers 47% more strength than 3/8" BBB
- ▶ 5/16" Hi-Test offers twice the strength of 5/16" BBB

Note: New England 3-Strand Medium Lay Nylon rope and Weisenfels HT or ACCO HT 64 chain is required for Powerwinch windiasses. Custom Rodes available with 24 hour turn-around. Call 800-243-3097 or visit www.powerwinch.com for more information and custom order form.

15

Part # P77099

Multipurpose rope winch for anchorino, sailino & fishino

Capstan

- Fast 40'/min retrieval speed
- ▶ 1000 lb max pulling power
- Handles unlimited rope lengths
- Easy to operate foot switch (included) All aluminum housing with a durable polyester finish
- Thermal automatic resetting circuit breaker
- One piece, heat-treated and oil-impregnated gears
- ▶ Protect-a-deck gasket (1/8" rubber)
- Stainless steel internal shafts, fasteners, and hardware
- ▶ Two year limited warranty



1000 pounds of pullino power! Our Jargest capstan, the Capstan 1000, is a power assisted rope capstan for larger applications. A great tool for quick retrieval of lobster, prawn and crab pots. The Capstan 1000 also provides power assist for limited crew sailboats and power assisted anchor retrieval. Uses up to 3/4" diameter rope.

Installation kit & solenoid Part # P10720 (Sold separately)

Power assisted rope capstan for boats up to 26'

- Strong pulling power of 300 lbs
- Ouick retrieval speed of 85 ft/minute
- Deck mounted design saves space for rope locker
- · Handles unlimited rope lengths
- Easy to operate foot control switch (included)
- All aluminum housing with a durable polyester paint finish
- Stainless steel internal shafts, fasteners, & hardware
- One-piece gears heat treated/oil-impregnated
- Protect-a-deck gasket 1/8" rubber
- ▶ Two year limited warranty

Versatile rope winch for anchorino, sailino, fishino The Capstan 300 is a smaller power assisted rope capstan for a variety of uses for boats up to 26'. It has a maximum pull of 300 lbs with a retrieval speed of 85 feet per minute. Whether anchoring, sailing, or fishing, let the Capstan 300 help spare your back, speed up your retrieval process, and make your boating more pleasurable.

Installation kit & solenoid Part # P55800 (Sold separately)

	capsc	an comp	arison unai	[C	Find the capstan that's right for your boat				
MODEL	Boat Length	Max. Pull	Line Size	Rope Type	Power Source	Thermal Resetting Circuit Breaker	Unit Weight	Min. Suggested Wire Size	Overall Dimensions
Quick Catch	-	200 lbs	Up to 5/8"	most stranded	12 volt	80 amp	19 lbs	6 gauge, 50' run	10 ∜16" L x 8"W x 65/16"H
Capstan 300	26'	300 lbs	Up to 5/8"	3 strand nylon	12 volt	25 amp	20 lbs	8 gauge, 50' run	10 ∜16"L x 8"W x 6 ∜16"H
Capstan 1000	-	1000 lbs	Up to 5/8"	3 strand nylon	12 volt	80 amp	23 lbs	6 gauge, 50' run	10∜16"L x 8"W x 65/16"H



Spend more time fishino, less time pullino pots

- Fast 150'/min retrieval with 100 lb load
- 200 lb max pull rating Twice as fast as the 300
- Low current motor draw
- Easy to operate foot control
- Handles unlimited rope lengths
- Stainless steel internal shafts, fasteners and hardware
- · All aluminum housing, e-coat primer with a powder topcoat
- One piece, heat-treated and oil-impregnated powdered metal gears
- Two year limited bow to stern warranty

UD to 200 DOUNDS OF DUILING DOWER! Our Quick Catch Pot Puller is perfect for fast, safe and easy retrieval of lobster or crab pots with a fast retrieval speed of 150' ft/minute. Electrical power assist retrieves pots in less than two minutes!

Installation kit & solenoid Part # P10720 (Sold sengrately)



Load Pounds	Line Spee							
50 lbs	175 (ft/mi							
100 lbs	150 (ft/mi							
150 lbs	120 (ft/mi							
100 lbs	150 (ft/mi							
Average 12V current draw								
@ 100 lb	c = 12 amns							

Quick Catch Pot Puller

FOOL SWILCH "2 in 1" combined Foot Switch for anchor windlasses



P55500 Compact, low profile, with safety cover to prevent accidental activation and water protection. Eliminate the need for two foot switches with the new combination Powerwinch Foot Switch. Contains both the raising and lifting switches in one compact white case.

- Measures 7-11/16" L x 3-7/8" W x 1" H
- Switch & casing is made from ABS material with UV protection
- Includes 30' of 16 gauge wire for electrical connections
- Includes fasteners for mounting switch to deck
- Must be used with a dual reversing solenoid, part number P10282

Anchor Safetu Strap Galvanized cable with vinvl coating P55042 Attaches to boat deck

with evebolt and hooks to the anchor chain to prevent accidental launch of the anchor



Universal Wiring Hit For Free-Fall Anchor Windlasses Installation



Wiring Kits are uniquely designed for Powerwinch anchor winches, as well as other brands of horizontal anchor windlasses. The Windlass Universal Wiring Kits fit boats from 25' to 46'. One year limited warranty.

Powerwinch Windlass Universal

Select from two sizes:

- P55800 is for Powerwinch 25'-36' class Anchor Winches, or other brand windlasses for boats up to 36'
- P55600 is for Powerwinch 40' to 46' class Anchor Winches, or other brand windlasses for boats up to 46'

Each Universal Wiring Kit is pre-assembled at the factory for convenience. Everything is included in these kits to make your installation easy.

Solenoids & Switches













P10705004

P10648004 I

25 amo Manual